



INTEGRATED ALL-GLASS SYSTEMS GEZE IGG
INTELLIGENCE BETWEEN THE PANES



CONTENTS

| | |
|--|-----------|
| Solutions for all-glass systems – GEZE IGG | 4 |
| Automatic sliding and telescopic sliding doors GEZE Slimdrive SL NT resp. SLT with IGG | 5 |
| Manual sliding wall system GEZE MSW with IGG | 7 |
| Manual sliding doors GEZE Perlan 140 with IGG | 8 |
| IGG double-action doors | 10 |
| IGG single-action doors | 11 |
| GEZE references | 12 |

GEZE IGG – solutions for all-glass systems

Intelligence between the panes

Glass, besides timber and bricks, is one of the oldest building materials of mankind. Even today glass is still used - with upward tendency -, especially with regards to economical and ecological aspects. More than ever we take advantage of the outstanding physical properties of glass such as hardness, elasticity and the coefficient of heat transmission. Thus new and transparent living areas are created for people, animals and plants - without the need to make concessions to flexibility, protection, warmth or comfort. Modern production processes and hardware systems take an important share in this development.

GEZE IGG means that the profiles and hardware system are invisibly integrated between two panes – without any protruding visible parts on the glass surface. A perimeter printing on the interior side of the panes makes the fittings completely invisible to the human eye. Wherever fittings and profiles spoiled the aesthetic appearance of glass elements in the past, GEZE IGG will allow freedom in design in future. The continuous design of façades can now be realised without incongruity of style, irrespective of whether sliding partitions, sliding doors, single-action or double-action doors are planned.



MSW with IGG, Pavillon Lapidarij Novigrad, Istra, Croatia (Photo: Robert Les)

GEZE IGG SYSTEMS

Range of application

- For interior and exterior installations
- Automatic and manual sliding doors
- Manual sliding wall systems
- Automatic and manual swing doors

Structure of the elements

- Exterior pane (types of glass: toughened safety glass ESG-H or laminated safety glass VSG of ESG)
- Spacer
- Holding profiles for the fittings
- Interior pane (types of glass: toughened safety glass ESG-H or laminated safety glass VSG of ESG)
- Edge printing of the panes (min. width 30 mm)
- Perimeter printing in the gap between the panes
- Gap between the panes SZR 27 mm



GEZE Slimdrive SL NT/SL NT-FR and SLT/SLT-FR with IGG

Advanced design owing to optimised technology

GEZE Slimdrive SL NT stands for optimised sliding door technology. With a construction height of only 7 cm this driving system convinces by perfection, requiring only a minimum of space: control with 16 bit high-performance micro processor, various setting possibilities, high reliability with all functions being maintained etc.



Slimdrive SL NT with IGG, Glas Trösch, Kempten, Germany (Photo: Nikolaus Grünwald)

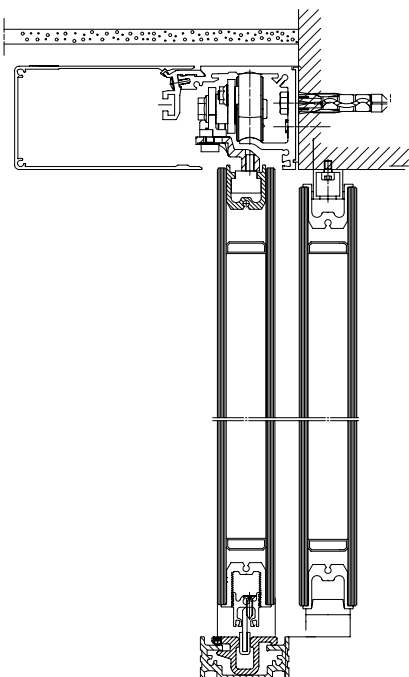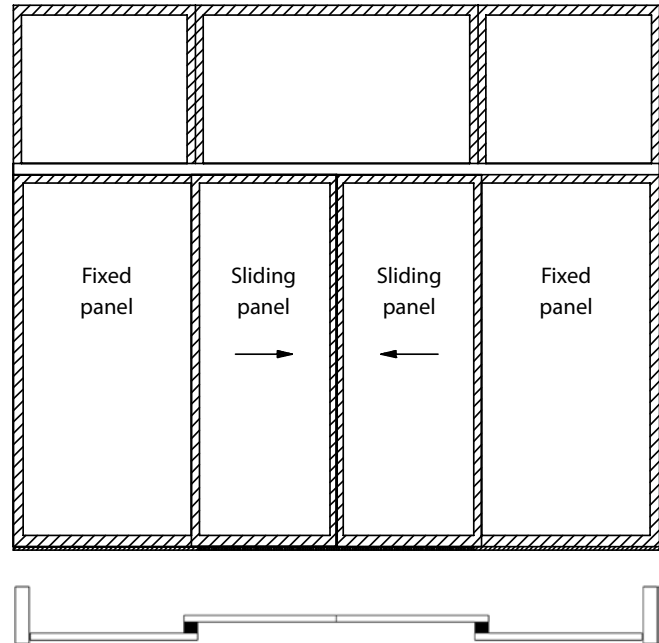

Product features

The reduction of the technology to the essential moreover offers considerable ecological and economical advantages:

- Environmentally friendly due to economical and ecological use of material and energy
- Tailored-to-size system production
- Simple, quick installation and adjustment
- Safe maintenance diagnosis

The Slimdrive SL NT (SLT for sliding doors with telescopic opening) is a fully modular, all-aluminium construction system and consists of mounting profile, running rail profile, cover and side parts.

The drive simply disappears in the façade thus creating transparency and consequent aesthetics. Double noggings and mullion profiles are a thing of the past. What you get instead: frameless door leaves – without any compromises.

Simple installation – flexible use

All components and the cover can be fitted from behind. The Slimdrive SL NT and SLT drives are perfectly suitable for installation in nearly all common post-rail-façade profiles..


- Slimdrive SL NT-FR and SLT-FR are approved for the use on escape and rescue routes

TECHNICAL DATA

| | | Slimdrive SL NT/SL NT-FR | Slimdrive SLT/SLT-FR |
|---------------------------|--------|--------------------------|----------------------|
| Opening width | 1-leaf | max. 3000 mm | - |
| | 2-leaf | max. 3000 mm | max. 3000 mm |
| | 4-leaf | - | 1600 – 3600 mm |
| Max. leaf weight | 1-leaf | 125 kg | - |
| | 2-leaf | 2 x 125 kg | 2 x 80 kg |
| | 4-leaf | - | 4 x 80 kg |
| Opening speed | | max. 0.8 m/s | max. 0.8 m/s |
| Closing speed | | max. 0.8 m/s | max. 0.8 m/s |
| Door leaf with IGG system | | with concealed fittings | |

| IGG limits of application | | |
|----------------------------|---|-----------------------|
| Max. weight of element | Fixed panel | 200 kg |
| | Sliding door leaf Slimdrive SL NT | 125 kg |
| | Sliding door leaf Slimdrive SLT | 80 kg |
| Max. side ratio | Process-inherent | 1 : 5 |
| | Optimum running smoothness Slimdrive SL NT | 1 : 3 |
| | Max. for Slimdrive SL NT and SLT | 1 : 4 |
| Door leaf height | | up to approx. 3000 mm |
| Max. admissible deflection | | 8 mm or 1/200 |
| Standard values | Weight per unit area for 2 x ESG 6 (IGG standard) | 34 kg/m ² |
| | Weight per unit area for 2 x ESG 8 (1 side > 3000 mm) | 44 kg/m ² |

SLIMDRIVE SLT WITH IGG

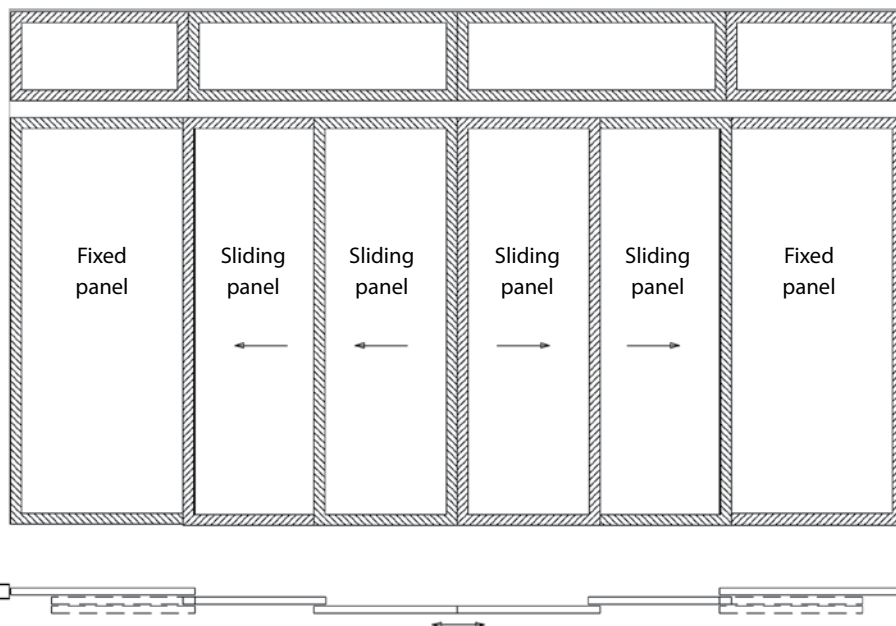


GEZE manual sliding wall system MSW with IGG

Transparent partition wall

GEZE MSW is the manual sliding wall system for transparent separation of rooms by means of moveable glass elements. A flexible modular system and the integration of leaf elements of different functions offer architects and designers the freedom to realise individual sliding walls. GEZE MSW offers optimum solutions for innovative all-glass design for pretentious building projects.



MSW with IGG, MSW with IGG, Pavillon Lapidarij Novigrad, Istra, Croatia (Photo: Robert Les)

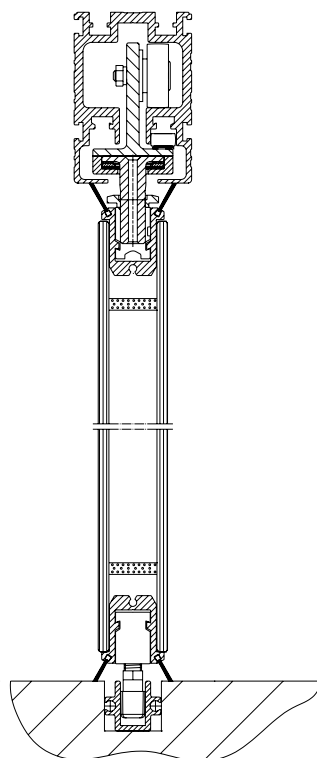

Product features

- Excellent running properties and almost silent operation due to the high-quality precise roller bearings
- Minimal use of force required to manually slide the glass elements
- Fitting elements integrated in the gap between the panes
- Max. leaf weight 150 kg (with dual roller carriage)
- Suitable for door leaf heights up to 3500 mm and widths up to 1200 mm (swing doors) resp. 1500 mm (sliding doors)
- Surrounding edge printing: horizontal min. 50 mm, vertical min. 30 mm
- Standard composition of panes: 2 x 6 mm toughened safety glass ESG-H, gap between the panes 27 mm
- Types of glass: ESG-H 6 mm (green glass) and ESG-H 6 mm (clear glass) for installation heights up to 3000 mm; ESG-H 8 mm (green glass) and ESG-H 8 mm (clear glass) for installation heights from 3000 mm to 3500 mm, other glass combinations possible (e.g. laminated safety glass VSG)
- Sealing: horizontally brush seals, vertically silicon seals
- Continuous floor guide as an option

Range of application

Light and transparent room partitioning in the form of an integrated all-glass system using a modular concept. The perfect partitioning wall for use in hotels, congress and shopping centres or airports.

- Combination with fixed panels, double-action, single-action, swing and sliding doors possible

GEZE Perlan 140 with IGG

Proven, robust and durable

GEZE Perlan 140 is a roller-guided sliding door system suitable for single, multiple and synchronous sliding doors. The elegant, understated design supports any desired spatial effect. The demanding technology, high-quality materials and first-class workmanship means that the sliding doors open with the least amount of force and make Perlan 140 the ideal solution for constant use in heavy frequented living and working areas.

PERLAN 140 WITH IGG



Product features

- 4 high-quality precision ball bearings
- Optimum load distribution due to triple pendulum suspension
- Precise guiding due to special track design, no lateral contact
- Runner channel of anodised light alloy; hanger bolts and nuts of special steel
- Outdoor installation possible
- Vertical and lateral adjustment
- Runner channel can easily be adjusted after installation
- Types of glass: toughened safety glass ESG-H 6 mm (green glass), ESG-H 6 mm (clear glass), other glass combinations possible (e.g. laminated safety glass VSG)
- Even possible in combination with SoftStop

Range of application


- For all types of sliding doors: single, multiple leaves and synchronous
- Wall and ceiling mounting
- For doors with a leaf weight of up to 140 kg
- Fixed panel up to 200 kg
- Max. height 2600 mm
- Version with SoftStop possible

PERLAN 140 WITH IGG

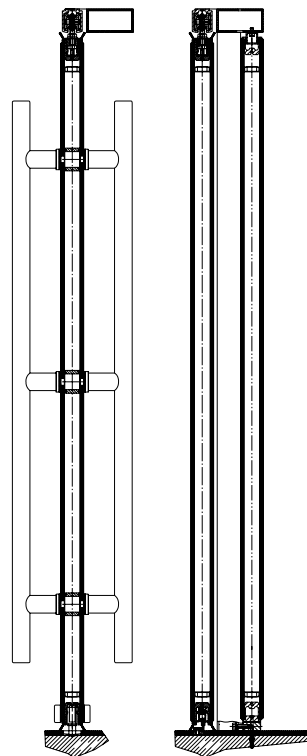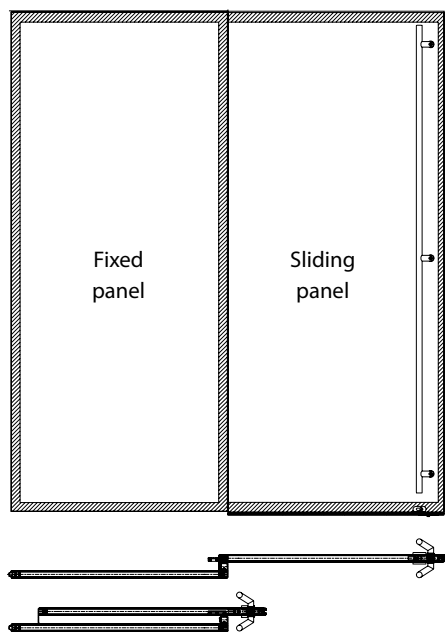

Standard installation


The leaves can be fixed to the wall or the ceiling using attachment brackets (hole interval 175 mm). The door is stopped at the top and at the bottom simultaneously by the stop buffer and an additional buffer that is fitted to the centre of the door or at the top.

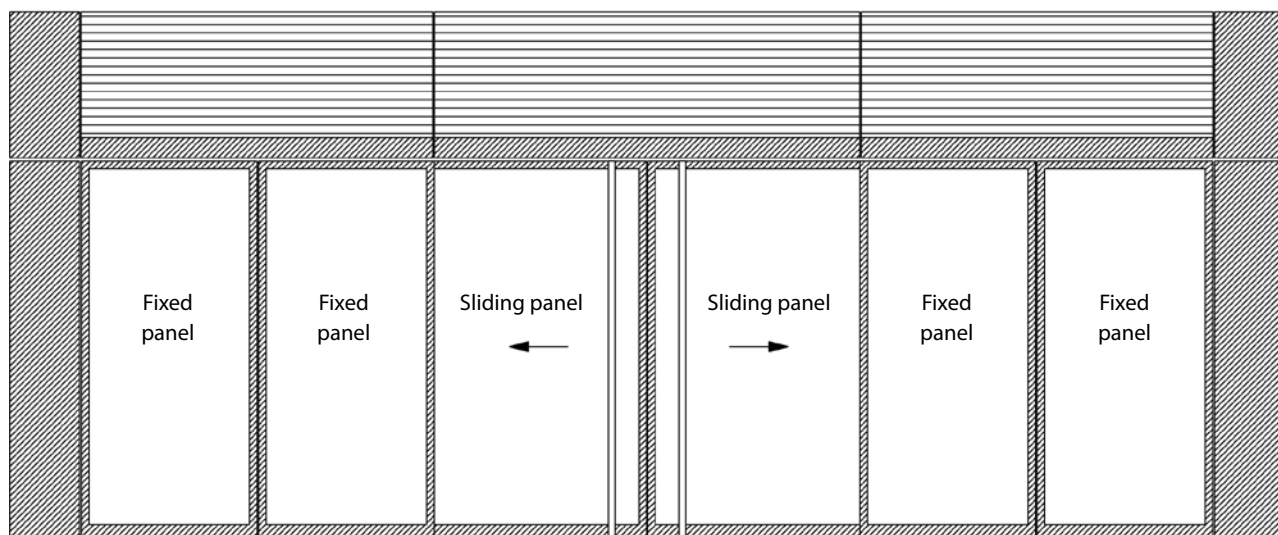

GEZE IGG double-action door

Flexibel to all directions

In banks, restaurants and hotels you often need doors that can be opened to both directions. The GEZE IGG double-action door offers the required flexibility and is suitable for every-day use, simultaneously offering high-quality and transparent construction. The double-action doors can be combined with the proven GEZE automatic door opening systems.

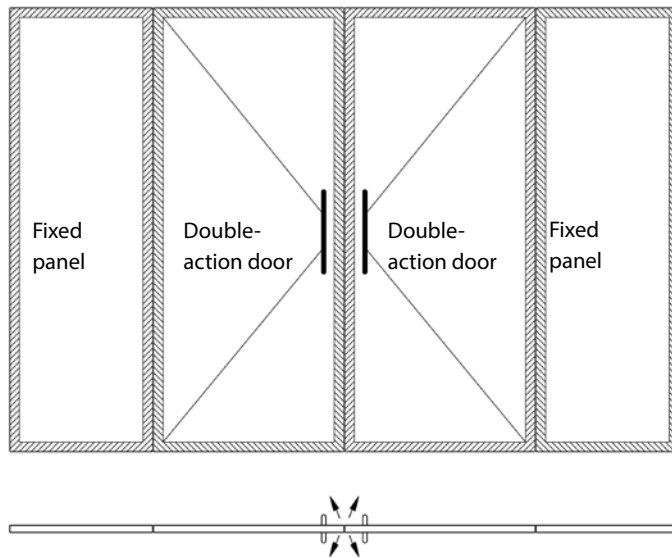

IGG DOUBLE-ACTION DOOR **Product features**

- Frameless all-glass element with fittings integrated between the panes (2 x 6 mm toughened safety glass ESG-H, gap between the panes 27 mm)
- Allround perimeter printing
- Dimensions: door width max. 1250 mm, height max. 2600 mm
- Thickness of door leaf approx. 40 mm
- Max. door leaf weight: 120 kg per leaf
- Fixed panel max. 200 kg
- Types of glass: toughened safety glass ESG-H 6 mm (green glass), ESG-H 6 mm (clear glass), other glass combinations possible (e.g. laminated safety glass VSG)
- Finish of spacers of ISO glazing: silver (standard), black or light grey
- Surface of integrated frame: C 35 (black)
- Types of mounting: frame, post-rail structure, wall installation
- With door closer: floor spring TS 500 NV / TS 550 NV

GEZE IGG single-action door


Simply ideal

Whether in public or private buildings: no doors are used more often than single-action doors. The GEZE IGG system allows the construction or even reconstruction of any sort of single-action doors. You are free to choose among a wide range of hinges, locks, handles, automatic closing and opening systems.



IGG on action door, Townhouse Ostfildern, Germany

(Photo: Nikolaus Grünwald)

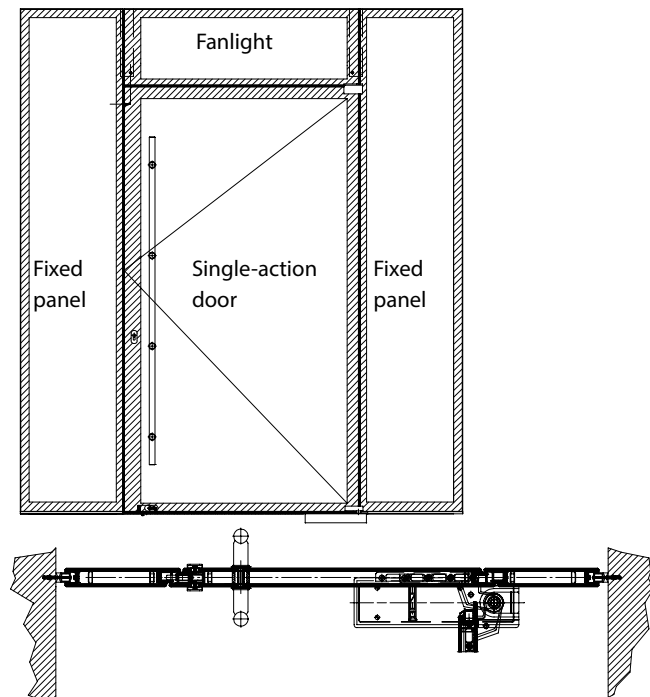

IGG SINGLE-ACTION DOOR

Product features

- Frameless all-glass element with fittings integrated between the panes (2 x 6 mm toughened safety glass ESG-H, gap between the panes 27 mm)
- With surrounding edge printing. Width of printing depends on fitting options.
- Dimensions: door width max. 1250 mm, height max. 2600 mm
- Thickness of door leaf approx. 40 mm (ESG-H)
- Max. door leaf weight: 120 kg per leaf
- Fixed panel max. 200 kg
- Types of glass: toughened safety glass ESG-H 6 mm (green glass), ESG-H 6 mm (clear glass), other glass combinations possible (e.g. laminated safety glass VSG)
- Finish of spacer of ISO glazing: silver (standard), black or light grey
- Surface of integrated frame: C 35 (black)
- Types of mounting: frame, post-rail structure, wall installation
- With door closer: overhead door closer TS 5000/TS 3000 V, floor spring TS 550 / TS 550 E

GEZE references



Slimdrive SL with IGG, Krämaren Shoppingcenter, Örebro, Sweden (Photo: Torbjörn Bergqvist Foto)



IGG single-action door, Graphic Design Museum, Breda, Netherlands (Photo: Erwin Kamphuis)

GEZE references



Slimdrive SLT IGG, Cafe Luitpold, Munich, Germany (Photo: Robert Sprang)



Slimdrive SL-FR IGG, conference centre Würzburg, Germany (Photo: Dirk Wilhelmy)

You will find more product information in the relevant brochures, see ID numbers.

Door technology

| | |
|-----------|--|
| 01 | Overhead door closers ID 091593, ID 091594 |
| 02 | Hold-open systems ID 091593, ID 091594 |
| 03 | Integrated door closers ID 091609 |
| 04 | Floor springs ID 091607 |
| 05 | Sliding door gear systems and linear guides ID 123605, ID 008770, ID 000586 |

Automatic door systems

| | |
|-----------|---|
| 06 | Swing doors ID 144785 |
| 07 | Sliding, telescopic and folding doors ID 143639 |
| 08 | Circular and semi-circular sliding doors ID 135772 |
| 09 | Revolving doors ID 132050 |
| 10 | Actuation devices and sensors ID 142655 |

Smoke and heat extraction and window technology

| | |
|-----------|---|
| 11 | Fanlight opening systems ID 127787 |
| 12 | Electric opening and locking systems ID 154851 |
| 13 | Electrical spindle and linear drives ID 154851 |
| 14 | Electric chain drives ID 154851 |
| 15 | Smoke and heat extraction systems ID 154851 |

Safety technology

| | |
|-----------|---|
| 16 | Emergency exit systems ID 132408 |
| 17 | Access control systems ID 132158 |
| 18 | Panic locks ID 132848 |
| 19 | Electric strikes ID 148666 |
| 20 | Building management system ID 132408 |

Glass systems

| | |
|-----------|---|
| 21 | Manual sliding wall systems (MSW) ID 104377 |
| 22 | Integrated all-glass systems (IGG) ID 104366 |
| 23 | GEZE Patch fittings mono glass systems ID 122521 |



POTENTIAL APPLICATIONS OF GEZE PRODUCTS



Door technology

The functionality, superior performance and reliability of GEZE door closers are impressive. A common design across the range, the ability to use them on all common door leaf widths and weights, and the fact that they can be individually adjusted makes their selection simple. They are continually being improved and enhanced with up-to-date features. For example, the requirements of fire protection and accessibility are fulfilled with a door closer system.

Automatic door systems

GEZE automatic door systems open up a huge variety of options in door design. The latest, innovative high-performance drive technology, safety, ease of accessibility and first class universal drive design set them apart. GEZE offers complete solutions for individual requirements. A dedicated division is responsible for the development and construction of individual special designs.

Smoke and heat extraction and window technology

GEZE smoke and heat extraction systems and ventilation technology provide complete systems solutions combining the many requirements of different types of windows. We supply a full range from energy efficient drive systems to natural ventilation and complete solutions for supplying and extracting air, also as certified SHEVs.

Safety technology

GEZE safety technology sets the standards where preventative fire protection, access control and anti-theft security in emergency exits are concerned. For each of these objectives GEZE offers tailored solutions, which combine the individual safety requirements in one intelligent system and close doors and windows in case of danger in a coordinated manner.

Building systems

In GEZE's Building Management System GEZE door, window and safety products can be integrated in to the security and control systems of the building. A central control and visualisation system monitors various automation components in the building and offers security through many different networking capabilities.

Glass systems

GEZE glass systems stand for open and transparent interior design. They can either blend discreetly into the architecture of the building or stand out as an accentuated feature. GEZE offers a wide variety of technologies for functional, reliable and aesthetic sliding wall or sliding door systems providing security with lots of design scope.

GEZE GmbH
P.O. Box 1363
71226 Leonberg
Germany

GEZE GmbH
Reinhold-Vöster-Straße 21-29
71229 Leonberg
Germany
Telefon +49 (0) 7152-203-0
Telefax +49 (0) 7152-203-310
www.geze.com

Germany
GEZE Sonderkonstruktionen GmbH
 Planken 1
 97944 Boxberg-Schweigern
 Tel. +49 (0) 7930-92 94-0
 Fax +49 (0) 7930-92 94-10
 sk.de@geze.com

GEZE GmbH
 Niederlassung Süd-West
 Breitwiesenstraße 8
 71229 Leonberg
 Tel. +49 (0) 7152-203-594
 Fax +49 (0) 7152-203-438
 leonberg.de@geze.com

GEZE GmbH
 Niederlassung Süd-Ost
 Parking 17
 85748 Garching bei München
 Tel.: +49 (0) 89-120 07 42-50
 Fax.: +49 (0) 7152-203-77050
 garching.de@geze.com

GEZE GmbH
 Niederlassung Ost
 Bühringstraße 8
 13086 Berlin (Weissensee)
 Tel. +49 (0) 30-47 89 90-0
 Fax +49 (0) 30-47 89 90-17
 berlin.de@geze.com

GEZE GmbH
 Niederlassung Mitte/Luxemburg
 Adenauerallee 2
 61440 Oberursel (b. Frankfurt)
 Tel. +49 (0) 6171-63 610-0
 Fax +49 (0) 6171-63 610-1
 frankfurt.de@geze.com

GEZE GmbH
 Niederlassung West
 Nordsternstraße 65
 45329 Essen
 Tel. +49 (0) 201-83 082-0
 Fax +49 (0) 201-83 082-20
 essen.de@geze.com

GEZE GmbH
 Niederlassung Nord
 Haus 11, 1. OG - Theodorstr. 42-90
 22761 Hamburg-Bahrenfeld
 Tel. +49 (0) 40-2 19 07 16-27
 Fax +49 (0) 40-2 19 07 16-28
 hamburg.de@geze.com

GEZE Service GmbH
 Niederlassung Süd-West
 Reinhold-Vöster-Straße 25
 71229 Leonberg
 Tel. +49 (0) 1802-923392
 Fax +49 (0) 7152-92 33 63
 service-leonberg.de@geze.com

GEZE Service GmbH
 Niederlassung Süd
 Parking 17
 85748 Garching bei München
 Tel. +49 (0) 1802-923392
 Fax +49 (0) 89-120 07 42-60
 service-muenchen.de@geze.com

GEZE Service GmbH
 Niederlassung Mitte
 Oberurseler Str. 69
 61440 Oberursel
 Tel. +49 (0) 1802-923392
 Fax +49 (0) 6171-63 327-19
 service-oberursel.de@geze.com

GEZE Service GmbH
 Niederlassung West
 Nordsternstraße 65
 45329 Essen
 Tel. +49 (0) 1802-923392
 Fax +49 (0) 201-8 30 82-25
 service-essen.de@geze.com

GEZE Service GmbH
 Niederlassung Nord-Ost
 Bühringstraße 8
 13086 Berlin (Weissensee)
 Tel. +49 (0) 1802-923392
 Fax +49 (0) 30-47021733
 service-berlin.de@geze.com

GEZE Service GmbH
 Niederlassung Nord
 Theodorstr. 42-90, Haus 11
 22761 Hamburg
 Tel. +49 (0) 1802-923392
 Fax +49 (0) 40-219 07 16-19
 service-hamburg.de@geze.com

Austria
GEZE Austria
 Wiener Bundesstrasse 85
 A-5300 Hallwang
 Tel: +43/6225/87180
 Fax: +43/6225/87180-299
 austria.at@geze.com

Baltic States
GEZE GmbH Baltic States office
 Dzelsavas iela 120 S
 1021 Riga
 Tel. +371 (0) 67 89 60 35
 Fax +371 (0) 67 89 60 36
 office-latvia@geze.com

Benelux
GEZE Benelux B.V.
 Steenoven 36
 5626 DK Eindhoven
 Tel. +31 (0) 40-26 290-80
 Fax +31 (0) 40-26 290-85
 benelux.nl@geze.com

Bulgaria
GEZE Bulgaria - Trade
 Representative Office
 Nickolay Haitov 34 str., fl. 1
 1172 Sofia
 Tel. +359 (0) 24 70 43 73
 Fax +359 (0) 24 70 62 62
 office-bulgaria@geze.com

China
GEZE Industries (Tianjin) Co., Ltd.
 Shuangchenzhong Road
 Beichen Economic Development
 Area (BEDA)
 Tianjin 300400, P.R. China
 Tel. +86 (0) 22-26 97 39 95-0
 Fax +86 (0) 22-26 97 27 02
 sales-info@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd.
 Branch Office Shanghai
 Unit 25N, Cross Region Plaza
 No 899, Ling Ling Road,
 XuHui District
 200030 Shanghai, P.R. China
 Tel. +86 (0) 21-523 40 960
 Fax +86 (0) 21-644 72 007
 chinasales@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd.
 Branch Office Guangzhou
 Room 17C3
 Everbright Bank Building, No.689
 Tian He Bei Road
 510630 Guangzhou
 P.R. China
 Tel. +86 (0) 20-38 73 18 42
 Fax +86 (0) 20-38 73 18 34
 chinasales@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd
 Branch Office Beijing
 Room 1001, Tower D
 Sanlitun SOHO
 No. 8, Gongti North Road,
 Chaoyang District
 100027 Beijing, P.R.China
 Tel. +86 (0) 10-59 35 93 00
 Fax +86 (0)10-59 35 93 22
 chinasales@geze.com.cn

France
GEZE France S.A.R.L.
 ZAC de l'Orme Rond
 RN 19
 77170 Servon
 Tel. +33 (0) 1 60 62 60 70
 Fax +33 (0) 1 60 62 60 71
 france.fr@geze.com

Hungary
GEZE Hungary Kft.
 Hungary-2051 Biatorbágy
 Vendel Park
 Huber u. 1.
 Tel. +36/23/532-735
 Fax +36/23/532-738
 office-hungary@geze.com

Iberia
GEZE Iberia S.R.L.
 C/ Andorra 24
 08830 San Boi de Llobregat
 (Barcelona)
 Tel. +34 902 194 036
 Fax +34 902 194 035
 info@geze.es

India
GEZE India Private Ltd.
 MF 2 & 3, Guindy Industrial Estate
 Ekkattuthangal
 Chennai 600 097
 Tamilnadu
 Tel. +91 (0) 44 30 61 69 00
 Fax +91 (0) 44 30 61 69 01
 office-india@geze.com

Italy
GEZE Italia S.r.l
 Via Giotto, 4
 20040 Cambiago (MI)
 Tel. +39 (0) 29 50 695-11
 Fax +39 (0) 29 50 695-33
 italia.it@geze.com

GEZE Italia S.r.l
 Via Lucrezia Romana, 91
 00178 Roma
 Tel. +39 (0) 6-72 65 311
 Fax +39 (0) 6-72 65 3136
 roma@geze.biz

Poland
GEZE Polska Sp.z o.o.
 ul. Annapol 21
 03-236 Warszawa
 Tel. +48 (0) 22 440 4 440
 Fax +48 (0) 22 440 4 400
 geze.pl@geze.com

Romania
GEZE Romania S.R.L.
 IRIDE Business Park,
 Str. Dimitrie Pompeiu nr. 9-9a,
 Building 10, Level 2, Sector 2,
 020335 Bucharest
 Tel.: +40 (0) 21 25 07 750
 Fax: +40 (0) 21 25 07 750
 office-romania@geze.com

Russia
OOO GEZE RUS
 Gamsonovskiy Per. 2
 115191 Moskau
 Tel. +7 (0) 495 933 06 59
 Fax +7 (0) 495 933 06 74
 office-russia@geze.com

Scandinavia - Sweden
GEZE Scandinavia AB
 Mallslingan 10
 Box 7060
 18711 Täby, Sweden
 Tel. +46 (0) 8-7323-400
 Fax +46 (0) 8-7323-499
 sverige.se@geze.com

Scandinavia - Norway
GEZE Scandinavia AB avd. Norge
 Industriveien 34 B
 2073 Dal
 Tel. +47 (0) 639-57 200
 Fax +47 (0) 639-57 173
 norge.se@geze.com

Scandinavia - Finland
Branch office of GEZE Scandinavia AB
 Herralantie 824
 Postbox 20
 15871 Hollola
 Tel. +358 (0) 10-40 05 100
 Fax +358 (0) 10-40 05 120
 finland.se@geze.com

Scandinavia - Denmark
GEZE Danmark
 Branch office of GEZE Scandinavia AB
 Mårkærvej 13 J-K
 2630 Taastrup
 Tel. +45 (0) 46-32 33 24
 Fax +45 (0) 46-32 33 26
 danmark.se@geze.com

Singapore
GEZE (Asia Pacific) Pte. Ltd.
 21 Bukit Batok Crescent
 #23-75 Wcega Tower
 Singapore 658065
 Tel. +65 6846 1338
 Fax: +65 6846 9353
 gezesea@geze.com.sg

South Africa
GEZE Distributors (Pty) Ltd.
 118 Richards Drive, Halfway House,
 Ext 111, P.O. Box 7934, Midrand 1685,
 South Africa
 Tel: + 27 (0) 113 158 286
 Fax: + 27 (0) 113158261
 info@gezesa.co.za

Switzerland
GEZE Schweiz AG
 Bodenackerstrasse 79
 4657 Dulliken
 Tel. +41 (0) 62 285 54 00
 Fax +41 (0) 62 285 54 01
 schweiz.ch@geze.com

Turkey
GEZE Kapı ve Pencere Sistemleri
 San. ve Tic. Ltd. Şti.
 Ataşehir Bulvarı, Ata 2/3
 Plaza Kat: 9 D: 84 Ataşehir
 Ataşehir / İstanbul
 Tel. + 90 (0) 216 455 43 15
 Fax + 90 (0) 216 455 82 15
 office-turkey@geze.com

Ukraine
LLC GEZE Ukraine
 ul. Viskoznaya, 17,
 Building 93-B, Office 12
 02660 Kiev
 Tel./Fax +38 (0) 44 501 22 25
 office-ukraine@geze.com

United Arab Emirates/GCC
GEZE Middle East
 P.O. Box 17903
 Jebel Ali Free Zone
 Dubai
 Tel. +971 (0) 4-88 33 112
 Fax +971 (0) 4-88 33 240
 geze@emirates.net.ae

United Kingdom
GEZE UK Ltd.
 Blenheim Way
 Fradley Park
 Lichfield
 Staffordshire WS13 8SY
 Tel. +44 (0) 1543 44 30 00
 Fax +44 (0) 1543 44 30 01
 info.uk@geze.com

GEZE REPRESENTATIVE